




PAROS

Decorative vertical radiator, designed modern and stylish. With a grand front panel, with curved edges, that covers the latest in heating technology.

- Fittings included: wall consoles, 1 rotating air vent, 3 blind stops, screws and plugs.
- Installation: 2 vertical MCW-V wall brackets.
- Paros radiators are available for two-pipe systems.
- The radiator is top/bottom reversible. Please note: top fitting requires a minimum water head column of 3 metres at the mouth of the radiator, at a minimum flow rate of 150 l/h.
- Colours : prices are based on white RAL 9016. Other RAL and special colours are available upon request with a 25% supplement.
- Fittings: 6 x Ø½" (15/21).

CONNECTION OPTIONS

See below: Standard connections that are available.

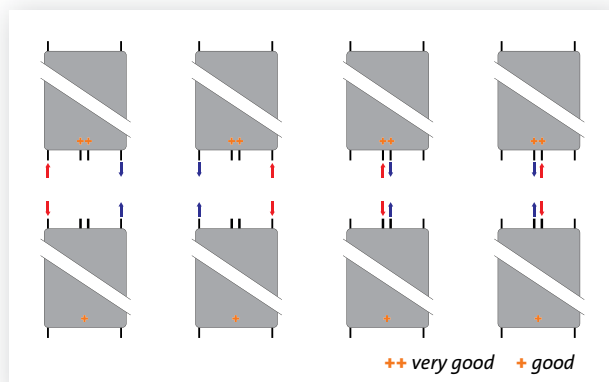

Accessories:



1. Towel bar

length	code	£
Type 11		
530mm	PAROS11530	187.66
680mm	PAROS11680	195.43
Type 21		
555mm	PAROS21555	187.66
705mm	PAROS21705	195.43



2. Two-pipe valve set

Straight Chrome

Code: C061

Price: **£111.52**



Angle Chrome

Code: C063

Price: **£111.52**

Prices exclude VAT

PAROS

type 11

INSTALLATION

ORDER CODE : PAV11XXXXYYY

EXAMPLE : PAV111800380

radiator

type

height

width

width (mm)	Watt + price	height (mm)	
		1800	2100
380	75/65/20	653	
	55/45/20	339	
	£	356.44	
530	75/65/20	976	
	55/45/20	509	
	£	383.31	
680	75/65/20	1298	1429
	55/45/20	678	752
	£	425.02	489.71
830	75/65/20		1749
	55/45/20		915
	£		551.00
75/65/20 - BTU/m		6513	7170
45/35/20 - BTU/m		1977	2203

stocked item

according EN 442 - 75/65/20 °C (ΔT 50) and 55/45/20 °C (ΔT 30)

To calculate from Watts to BTU's multiply by 3.412 (1000 watts x 3.412 = 3,412 btu's).

volume : litre

	1800	2100
380	3.50	
530	5.25	
680	7.00	8.12
830		10.15

value n

	1800	2100
380	1.2810	
530	1.2761	
680	1.2711	1.2575
830		1.2685


weight : kg

	1800	2100
380	21.00	
530	30.37	
680	39.73	47.75
830		59.20

bracket position : mm

	1800	2100
380	1605	-
530	1605	1905
680	1605	1905
830	1605	1905

A	B	C
overall width	rad width	centres
380	300	244
530	450	394
680	600	544
830	750	694

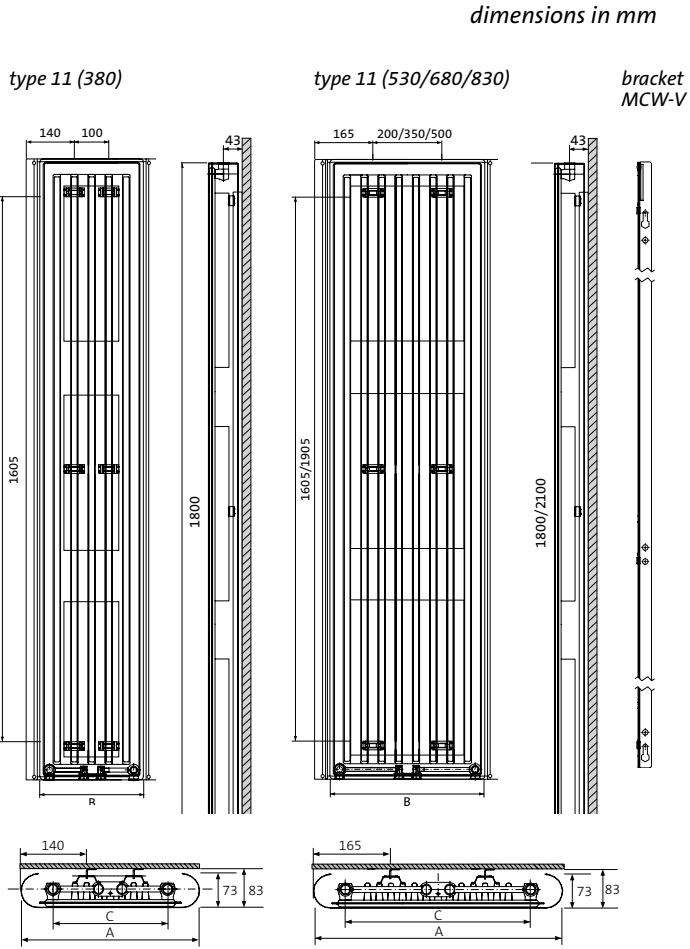

PAROS

type 21

INSTALLATION

ORDER CODE : PAV21XXXXYYY

EXAMPLE : PAV211800405

radiator

type

height

width

width (mm)	Watt + price	height (mm)	
		1800	2100
405	75/65/20	886	
	55/45/20	452	
	£	539.84	
555	75/65/20	1329	
	55/45/20	677	
	£	580.87	
705	75/65/20	1772	1957
	55/45/20	903	996
	£	643.69	716.80
855	75/65/20		2446
	55/45/20		1238
	£		806.56
75/65/20 - BTU/m		8576	9471
45/35/20 - BTU/m		2488	2715

stocked item

according EN 442 - 75/65/20 °C (ΔT 50) and 55/45/20 °C (ΔT 30)

To calculate from Watts to BTU's multiply by 3.412 (1000 watts x 3.412 = 3,412 btu's).

volume : litre

	1800	2100
405	6.44	
555	9.66	
705	12.88	15.28
855		19.10

value n

	1800	2100
405	1.3192	
555	1.3192	
705	1.3192	1.3231
855		1.3231

weight : kg

	1800	2100
405	30.08	
555	45.12	
705	60.16	70.24
855		87.80

bracket position : mm

	1800	2100
405	1605	
555	1605	1905
705	1605	1905
855	1605	1905

A	B	C
overall width	rad width	centres
405	300	244
555	450	394
705	600	544
855	750	694

