

# Slim | Technical Data Sheet

## Tubes

Vertical design radiator in anodized aluminium, with one towel bar.

## Connections

2 x 1/2" mid connections

## Mounting

The radiators are attached to the wall by means of 2 wall brackets matching the colour of the radiator.

## Mounting set

2 steel wall brackets. Mounting on the wall is possible with brackets especially designed for this radiator. Brackets are according VDI 6036 class III.

## Colours

White RAL 9016 as standard. Other available stock colours: Anthracite grey RAL 7016 matt & Jet black RAL 9005 matt + other available colours on request



Design

max. 6 bar

## Brand

Radson / Purmo

## Product

Slim

## Material

Aluminium bathroom radiator according  
EN442 – Extruded aluminium –  
Material thickness 1,5 mm

## Max operating temperature

90 °C

## Max operating pressure (MOP)

6 bar

## Max test pressure

1,3 x MOP

## Conformity

CE test report EN 442 1 & 2 – Reg. (EU) No 305/2001 –  
ISO 9001



# Slim | Tender Specifications



## Technical text & design

The Slim design radiator promises perfection and complements the classic style with its vertical, slender shape.

## Treatment and finish

Treatment procedure according to the standard DIN 55900 and EN 442 (emission-free):

- Preparatory phase: degreasing, phosphatising and rinsing with Demin water
- First varnishing phase: application of the primer by cataphoresis
- Final coating: according to the epoxy-polyester powder principle

## Range

1 model:

- height: 1890 mm
- width: 261 mm




Height (B)  
= 1890 mm

## Colours


White RAL 9016 as standard. Other available stock colours: Anthracite grey RAL 7016 matt & Jet black RAL 9005 matt + other available colours on request

## Mounting

The radiators are attached to the wall by means of 2 wall brackets matching the colour of the radiator.

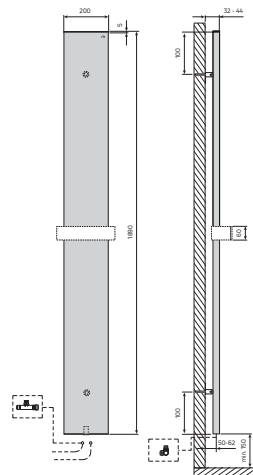


A = width  
B = height



top view

## Connection

2 x 1/2" mid connections



## Packaging & protection

The radiators are packed individually in cardboard, reinforced with corner segments. The whole cardboard box is shrink-wrap. The packaging remains around the radiator until it is mounted, in order to prevent damage.

## Norms

The emissions of the radiators, expressed in watts, are measured according to standard EN 442. The supply temperature is 75 °C, the return temperature 65 °C and the ambient temperature is 20 °C.

## Warranty

5 years

SLIM							
Type	Dimensions (mm)			Weight (kg)	Volume (l)	N Factor	75/65/20°C (watt)
	Centre distance connections	Height (B)	Width (A)				
Slim 1890x390	-	1890	261	6,60	0,90	1,3110	430

stock

75/65/20 according to EN442

