




TINOS

The modern and stylish Tinos is a decorative vertical radiator. Its grand front panel with straight edge covers the latest in heating technology.

- Fittings included: wall consoles, 1 rotating air vent, 3 blind stops, screws and plugs.
- Installation: 2 vertical MCW-V wall brackets.
- Tinos radiators are available for two-pipe systems.
- The radiator is top/bottom reversible. Please note: top fitting requires a minimum water head column of 3 metres at the mouth of the radiator, at a minimum flow rate of 150 l/h.
- Colours : prices are based on white RAL 9016. Other RAL and special colours are available upon request with a 25% supplement.
- Fittings: 6 x Ø½" (15/21).

CONNECTION OPTIONS

See below: Standard connections that are available.

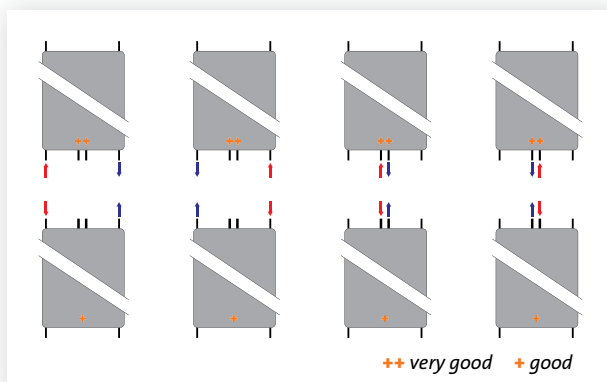

Accessories:



1. Towel bar

length	code	£
Type 11		
475mm	TINOS11475	187.66
625mm	TINOS11625	195.43
Type 21		
475mm	TINOS21475	187.66
625mm	TINOS21625	195.43



2. Two-pipe valve set

Straight Chrome

Code: C061

Price: **£111.52**



Angle Chrome

Code: C063

Price: **£111.52**

Prices exclude VAT

TINOS

type 11

INSTALLATION

ORDER CODE : **TIV11XXXXYYY**
EXAMPLE : **TIV111800325**

radiator

type

height

width

width (mm)	Watt + price	height (mm)	
		1800	2100
325	75/65/20	653	
	55/45/20	339	
	£	339.47	
475	75/65/20	976	
	55/45/20	509	
	£	365.06	
625	75/65/20	1298	1429
	55/45/20	678	752
	£	404.78	466.39
775	75/65/20		1749
	55/45/20		915
	£		524.77
75/65/20 - BTU/m		6513	7170
45/35/20 - BTU/m		1977	2203

stocked item

according EN 442 - 75/65/20 °C (ΔT 50) and 55/45/20 °C (ΔT 30)

To calculate from Watts to BTU's multiply by 3.412 (1000 watts x 3.412 = 3,412 btu's).

volume : litre

	1800	2100
325	3.50	
475	5.25	
625	7.00	8.12
775		10.15

value n

	1800	2100
325	1.2810	
475	1.2761	
625	1.2711	1.2575
775		1.2685


weight: kg

	1800	2100
325	21.00	
475	30.37	
625	39.73	47.75
775		59.20

bracket position: mm

	1800	2100
325	1605	
475	1605	-
625	1605	1905
775	1605	1905

A	B	C
overall width	rad width	centres
325	300	244
475	450	394
625	600	544
775	750	694

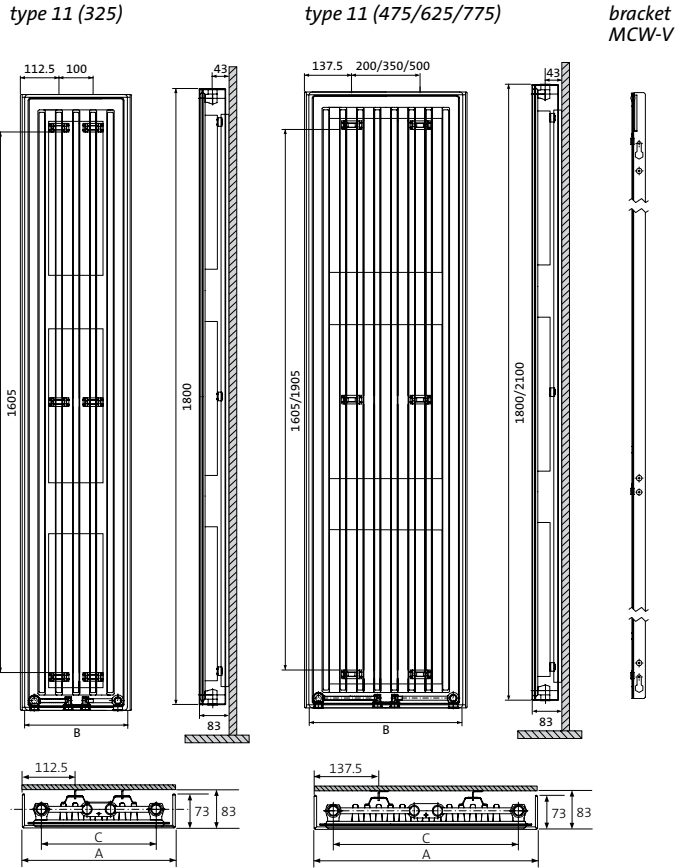

dimensions in mm

TINOS

type 21

INSTALLATION

ORDER CODE : **TIV21XXXXYYY**
EXAMPLE : **TIV211800325**

radiator

type

height

width

width (mm)	Watt + price	height (mm)	
		1800	2100
325	75/65/20	886	
	55/45/20	452	
	£	514.13	
475	75/65/20	1329	
	55/45/20	677	
	£	553.21	
625	75/65/20	1772	1957
	55/45/20	903	996
	£	613.05	682.66
775	75/65/20		2446
	55/45/20		1244
	£		768.15
75/65/20 - BTU/m		8576	9471
45/35/20 - BTU/m		2488	2715

stocked item

according EN 442 - 75/65/20 °C (ΔT 50) and 55/45/20 °C (ΔT 30)

To calculate from Watts to BTU's multiply by 3.412 (1000 watts x 3.412 = 3,412 btu's).

volume : litre

	1800	2100
325	6.44	
475	9.66	
625	12.88	15.28
775		19.10

value n

	1800	2100
325	1.3192	
475	1.3192	
625	1.3192	1.3231
775		1.3231


weight : kg

	1800	2100
325	30.08	
475	45.12	
625	60.16	70.24
775		87.80

bracket position : mm

	1800	2100
325	1605	-
475	1605	1905
625	1605	1905
775	1605	1905

A	B	C
overall width	rad width	centres
325	300	244
475	450	394
625	600	544
775	750	694

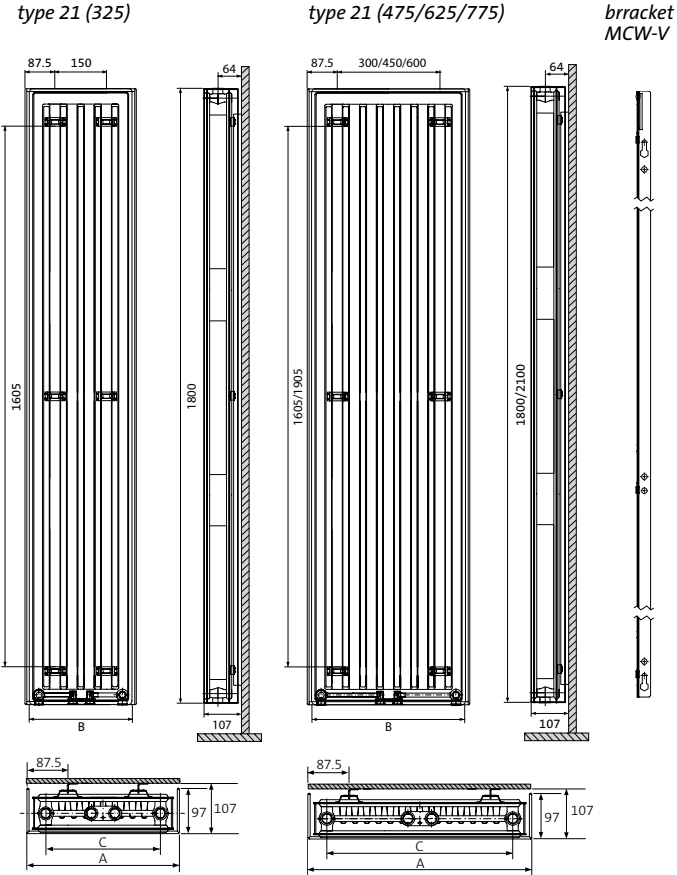

dimensions in mm

Prices exclude VAT

Prices exclude VAT